




GIRISHEGO

Stem Type Thermostats & Thermal Cut-out

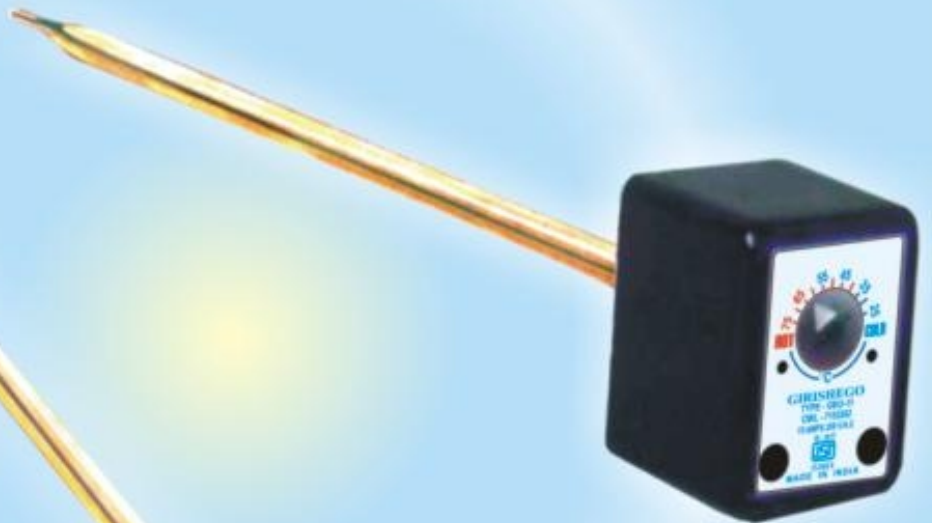

IS : 3017





GIRISHEGO

IS : 3017
CLASS-II
CML - 7153262

Stem Type Thermostats & Thermal Cutouts


'GIRISHEGO' Range of stem type thermostats are designed to meet a variety of requirements for domestic, industrial and commercial heating systems. Our thermostats come in different shapes and models to suit the individual requirement of application and economy. These are suitable for instant and storage type water heaters, water and oil baths, moulds, sterilizers, ovens, boilers, switchgear and panel boards and other domestic and industrial heating appliances.

PRINCIPLE OF OPERATION: With temp rise, the principle of differential expansion of brass tube and a nickel / iron (inver) Rod is used to actuate a highly accurate snap action micro gap switch located in the head which makes it keep the temperature of liquid or solid, constant within the differential i.e. A Single pole, single throw, normally closed circuit breaks (opens) on rise of temperature.

CONSTRUCTION: The micro gap switch assembly is mounted on a heat resistant base, with brass terminals. Heavy duty Ag cdo contacts are provided for long trouble free life. A thermoplastic/thermosetting cover with clear and precise graduations is provided along with a setting knob. A spring steel clip is provided for snap on fixing of Thermostat. It can be fixed in any position. Thermostats are available in three standard stem lengths 7" (175mm), 11" (275 mm), 18" (450mm) with tube diameter of 5/16" (8mm).

AVAILABLE ON REQUEST:

- 1) Smaller stem lengths of 4" (115 mm) & 5" (125mm)
- 2) Normally Open Contacts. (N.O.C.)
- 3) Preset at fixed temperature
- 4) Higher insulation resistance and H.V. for switchgear and panel boards

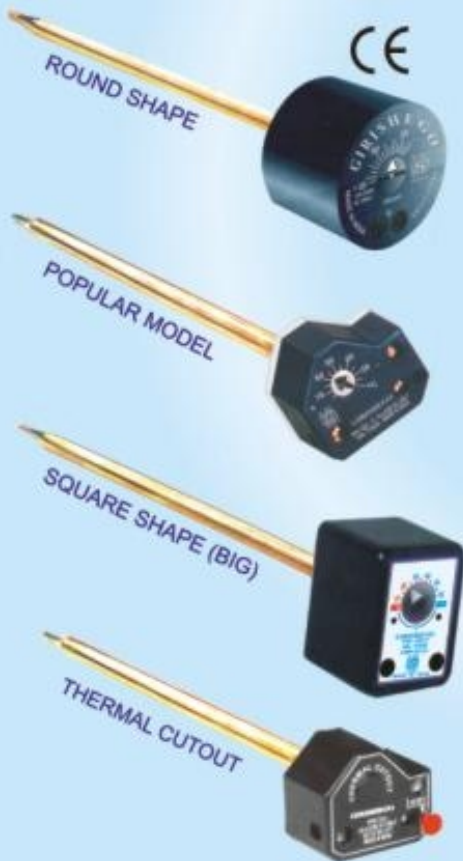

Model No.	Stem Length	Temp. Range	Standard Packing	Despatch Packing
ROUND SHAPE THERMOSTAT 15 AMP 250 V A.C.				
200-C	175 mm	0-60°C	25 Nos.	100 Nos.
* 205-C	175 mm	30-85°C	25 Nos.	100 Nos.
208-C	175 mm	25-125°C	25 Nos.	100 Nos.
210-C	175 mm	25-150°C	25 Nos.	100 Nos.
215-C	175 mm	50-200°C	25 Nos.	100 Nos.
* 305-C	275 mm	25-85°C	25 Nos.	100 Nos.
306-C	275 mm	5-90°C	25 Nos.	100 Nos.
308-C	275 mm	25-125°C	25 Nos.	100 Nos.
310-C	275 mm	25-150°C	25 Nos.	100 Nos.
315-C	275 mm	25-200°C	25 Nos.	100 Nos.
410-C	450 mm	25-150°C	25 Nos.	50 Nos.
"POPULAR" MODEL THERMOSTATS 15 AMP 250 V A.C.				
GEC-5	125 mm	30-85°C	100 Nos.	100 Nos.
* GEC-7	175 mm	30-75°C	100 Nos.	400 Nos.
* GEC-11	275 mm	30-75°C	100 Nos.	400 Nos.
SQAURE (BIG) THERMOSTATS 15 AMP 250 V A.C.				
* GEO-11	275 mm	30-75°C	25 Nos.	100 Nos.
THERMAL CUT-OUT 20 AMP 250 V A.C.				
TCO-7	175 mm	Set at 90°C	100 Nos.	400 Nos.
TCO-11	275 mm	set at 90°C	100 Nos.	400 Nos.
* Marked One Year Guarantee Against Mfg. Defects				

Mfd. By:



GIRISH EGO CONTROLS

31, Tavawala Bldg., 147 Lohar Chawl, Mumbai-400 002.

Tel.: 91 22 2206 8032, 2208 3857 Fax : 91 22 2209 6234

E-mail : info@girishego.com Website : www.girishego.com

Authorised Dealers :-